


Standard Basic Module - Open Type

- Highly efficient gas engine
- Highly efficient AC synchronous alternator
- Gas safety train
- Exhaust flue and jacket water heat exchanger
- Heating water and jacket water circulation system
- Advanced engine control system, including: ignition system, detonation control system, speed control system, air/fuel ratio control system
- Strict shop test for all CHP units
- Industrial silencer reduces the noise by 12-20dB(A)
- Separate switch cabinet and electric control cabinet
- Multi-functional control system with easy operation
- Data communication interfaces integrated into control system
- Monitoring battery voltage and charging automatically
- Automatic oil refilling system
- Bus interface for connecting to higher level control unit

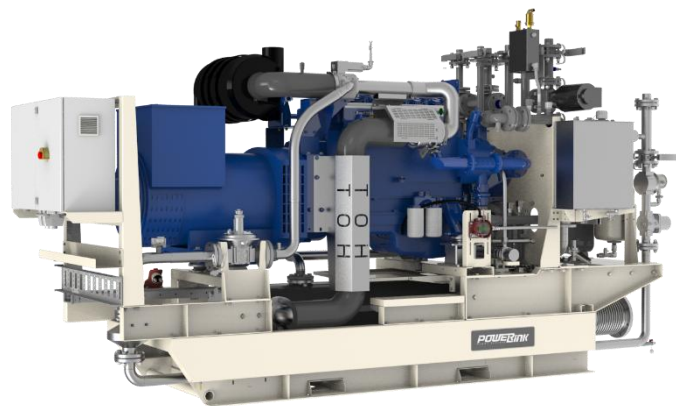

Structure and Control Cabinet

Structure Type	Open type
Spraying Process	High quality powder coating
Electrical control cabinet	Integrated, IP54
Noise level @ 1m, dB(A)	100
@ 7m, dB(A)	91.1
@ 10m, dB(A)	86.9

Power and Efficiency @50Hz

Electric power -kW	200	Electric efficiency	35.7%
Thermal power-kW	271	Thermal efficiency	48.4%
Fuel Input -kW	560	Total efficiency	84.1%

Dimension and Weight

Dimension (LxWxH) , mm	4250x1300x2000
Weight, kg	4400

Special statement :

- The technical data is based on natural gas with a lower calorific value of 34.2MJ/Nm³. The technical data indicated is based on standard conditions according to ISO8528/1, ISO3046/1 and BS5514/1.
- The technical data is measured in standard conditions:
Absolute atmospheric pressure: 100kPa
Ambient temperature : 25°C
Relative air humidity : 30%
- Rating adaptation at ambient conditions acc to DIN ISO 3046/1.
The tolerance for the specific fuel consumption is + 5 % at rated output.
- Technical data above are just for standard product ,and may be subject to change. As this document is used only for presale reference, take the specification supplied by PowerLink before ordering as final.

Fuel and Emission

Fuel type	Natural gas
Methane number	MN > 80
Excess air factor (Lambda)	1.40
Fuel consumption @100% load, m ³ /h	59
Supply gas pressure range (gage pressure), kPa	10~20
Emission without catalytic converter	
NOx , mg/Nm ³	<500mg/Nm ³
CO , mg/Nm ³	<650mg/Nm ³
HCHO (formaldehyde) , mg/Nm ³	<60mg/Nm ³
NMHC , mg/Nm ³	<150mg/Nm ³
Emission with catalytic converter (optional)	
NOx , mg/Nm ³	≤250mg/Nm ³

GXC200-NG

Natural Gas CHP Unit

POWERink
Power Systems
We Produce Green Energy...

Standard Basic Module + Acoustic Attenuated Canopy (Optional)



Dimension and Noise Level

Canopy Size	4500*1400*2400mm
Noise Level@ 1m , dB(A)	80.2
@ 7m , dB(A)	72.9
@ 10m , dB(A)	68.9

- ☐ Modular designed and manufactured for plug and play
- ☐ Environmental friendly low emission
- ☐ Small indoor space required for installation
- ☐ Low noise does not affect the surrounding environment



GXC200-NG

Natural Gas CHP Unit



Standard Basic Module + Acoustic Attenuated Container (Optional)



Dimension and Noise Level	
Optional container (mm) (customized container modeling service available)	<input type="checkbox"/> 7000*2300*2500
	<input type="checkbox"/> 6058*2438*2591
	<input type="checkbox"/> 12192*2438*2896
	<input type="checkbox"/> 12192*3000*2896
	<input type="checkbox"/> 13500*3000*2896
Noise Level@ 1m , dB(A)	78
	@ 7m , dB(A) 70
	@ 10m , dB(A) 66

- ☐ Outdoor application enabled, weatherproof and dustproof, corrosion preventive
- ☐ Environmental friendly low emission
- ☐ Modular designed and manufactured for plug and play
- ☐ Low noise does not affect the surrounding environment



CHP Unit performance data and manufacturing technology

Model	GXC200-NG	Power and efficiency			
Frequency (Hz)	50	Load	100%	75%	50%
Electric output power (kW)	200	Electric power (kW)	200	150	100
Thermal output power (kW)	271	Heat power (kW)	271	205	138
Electric efficiency	35.7%	Energy input (kW)	560	416	290
Thermal efficiency	48.4%	Electric efficiency	35.7%	36.1%	34.5%
Total efficiency	84.1%	Heat efficiency	48.4%	49.3%	47.6%
Heating water temp. outlet(°C)	90~95	Total efficiency	84.1%	85.4%	82.1%
Heating water temp. return(°C)	70~75	Manufacturing technology <ul style="list-style-type: none"> ● Special welded base frame, inner vibration isolators and design for whole lifting ● With high-class paint, enduring brightness as well resistance against abrasion and defacing ● Installation manual, operation and maintenance manual wiring program Standards and certificate <ul style="list-style-type: none"> ● ISO3046 , ISO8528 , GB2820 ● BS5000PT99 , AS1359 , IEC34 ● ISO9001:2008 quality system certification 			
Hot water production @inlet 70°C/outlet 90°C[t/h]	10.99				
Overload runtime at 1.1xSe(hour)	1				
Voltage recovery time(s)	≤4				
Steady-state frequency regulation	±0.5%				
Transient -state frequency regulation	±5%				
Steady-state frequency band	0.5%				
Recovery time response(s)	0.5				
Frequency recovery time(s)	≤3				
Telephone interference factor(TIF)	≤50				
Telephone harmonious factor(THF)	≤2% , as per BS4999				

Gas engine



Brand	PowerLink	Energy balance and gas flow	
Model	GX12T-LE02C	Mechanical power (kW)	230
NO. of cylinders	6 in-line	Coolant heat (kW)	115
Bore x Stroke (mm)	126X155	Mixture heat HT(kW)	/
Displacement (L)	12	Mixture heat LT(kW)	/
Cooling system	Water cooled	Exhaust heat up to 120°C (kW)	156
Rated speed (rpm)	1500	Fuel Input (kW)	560
Excess air factor	1.40	Combustion air flow(kg/h)	/
Intake system	Turbocharged, intercooled	Exhaust gas flow(kg/h)	1079
Lube Oil consumption(kg/h)	0.06	Exhaust gas temperature(°C)	570
Combustion type	Lean burn	Gas consumption(m³/h) @ 100% load	59
Battery voltage(V)	24	75% load	44
Coolant type	Glycol mixture	50% load	31

AC alternator

Brand	PowerLink	Wiring connection	Star
Model	PL4MS	Rotor insulation class	H
Rated output power @400V (kW)	235.2	Winding pitch	2/3
Power factor	0.8	A.V.R. model	MX341
Rated current @400V (A)	424	Voltage fluctuation(no load to full load)	± 0.5%
Excitation system	PMG	Drip proof	IP23
THF (BS EN60034- 1)	<2%	Excitation method	Brushless
TIF (NEMA MG 1-22)	<50	Rated ambient temperature(°C)	40
Winding material	100% copper	Rated stator temperature rise(°C)	125

PCC-300 control system

Programmable control system is adopted with touch screen display , and various functions, including: engine protection and control, paralleling between gensets or gensets and grid, and CHP control functions, as well as communication functions, etc.

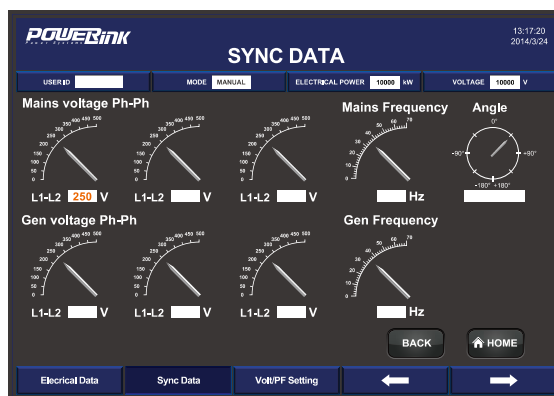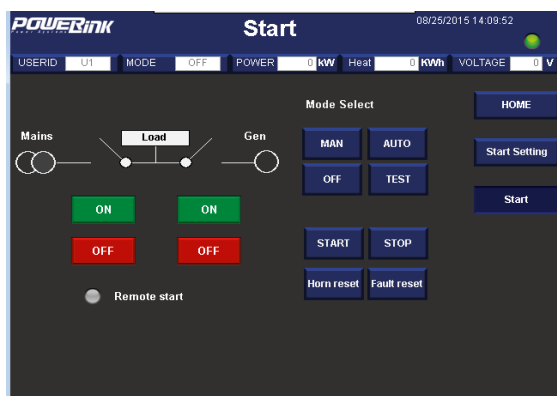

Main functions

- Engine monitor : coolant, lubrication, exhaust, battery
- Supply gas circuit monitor: pressure, temperature and CH₄ content
- Auto paralleling and load share
- Voltage and PF control
- Alternator data : U, I, Hz, kW, kVA, kVAr, PF, kWh, kVAh
- Grid data: U, I, Hz, kW, kVAr, PF
- Modbus communication protocol based on RS232 and RS485 interfaces
- SMS message
- Internet connection and USB 2.0 interface
- 10-inch touch screen
- Internet monitor, auto orientation and cloud communication
- 1000 history events log

Advantages

- Accordant with consumer requirement
- Complete control solution
- Convenient remote monitor and service
- Simplified engine start/stop control
- Enhanced stability and safety

Standard protection functions

Alternator protection

- 2xReverse power
- 2xOverload
- 4xOvercurrent
- 1xOvervoltage
- 1xUndervoltage
- 1xOver/underfrequency
- 1xUnbalanced current

Busbar/ Grid protection

- 1xOvervoltage
- 1xUndervoltage
- 1xOver/under frequency
- 1xPhase sequence
- 1xROCOF alarm

Standard control functions

Powercontrol

- RPM control(synchronization)
- Power control(grid connection)
- Load share(island)

Lubrication control

- Auto refilling
- Warning and monitoring

Fan control

- Ventilation for engine room
- Radiator fan
- Emergency radiator fan

Engine protection

- Various routine and customized protection functions
- Monitoring

Voltage control

- Voltage tracking (synchronization)
- Voltage control(island)
- PF control(grid connection)
- Reactive power share (island)

Pump control

- Cooling system
- Emergency radiator

Valve control

- Cooling system
- Heating system
- Emergency radiator

Standard configuration

Engine	Alternator	Canopy and base	Electrical cabinet
Gas engine Ignition system Lambda controller Speed control system Electrical start motor Battery system Detonation control system Lockable isolator switch Turbocharger & intercooler	PMG AC alternator H class insulation IP23 protection AVR voltage regulator	Steel monocoque base frame Engine bracket Vibration isolators Alternator base	Air circuit breaker Paralleling control system 10-inch touch screen Communication interfaces Breaker cabinet Mains floating charger Paralleling protection
Gas supply system	Lubrication system	Standard voltage	Intake/ exhaust system
Gas safety train Air/fuel mixer Throttle valve	Oil filter Daily auxiliary oil tank Auto refilling oil system New and used oil tank (Only applicable to container , two inch with the daily oil tank)	380/220V 400/230V 415/240V 440/254V	Air filter Exhaust silencer Exhaust bellows Gas flowmeter Gas leakage protection(Only applicable to canopy and container)
Heat exchange system	Service and documents		
Exhaust heat exchanger Jacket water circulation pump Jacket water heat exchanger Mixture circulation pump Expansion tank Heating circulation pump Three-way constant temp. valves Intercooler radiator	Tools package Installation and operation manual Maintenance manual Software manual Parts manual	Engine operation and maintenance manual Gas quality declaration Control system manual After service guide Standard package	

Optional configuration

Engine	Alternator	Lubrication system
Jacket water heater	Space heater Treatments against humidity and corrosion	
Electrical system	Gas supply system	Service and documents
RCD ATS control cabinet Thermal power gauge Electric power gauge	Gas flow gauge Emergency pressure relief torch Refrigerated gas drier Water separator Gas compressor Gas purification device	Service tools Maintenance and service parts
Voltage	Exhaust system	Exhaust gas using
220V 230V/240V	Three-way catalytic converter	Exhaust gas evaporator LiBr refrigerator