


CG1000-NG

Natural Gas CHP Unit

Standard Basic Module - Open Type

- Highly efficient gas engine and AC synchronous alternator
- Gas safety train
- Exhaust and jacket water heat exchanger
- Heating water and jacket water circulation system
- Advanced engine control system, including: ignition system, detonation control system, speed control system, air/fuel ratio control system and cylinder temp. protection system
- Strict shop test for all CHP unit
- Industrial silencer with silencing ability of 12-20dB(A)
- Unattached switch cabinet and electric control cabinet
- Multi-functional control system with simple operation
- Data communication interfaces integrated into control system
- Monitoring battery voltage and charging automatically
- Auto refilling oil system
- Bus interface for connecting to higher level control unit

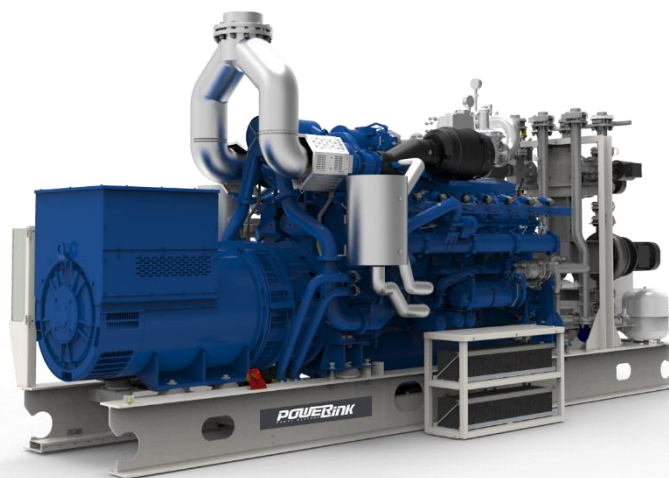

Structure and control cabinet

Structure type	Open type
Container painting	High-class paint
Electrical control cabinet	Integrated ,IP54
Noise level @1m, dB(A)	107.8
@7m, dB(A)	92.1
@10m, dB(A)	85.8

Dimension and weight

Dimension (LxWxH) , mm	7000X2000X2200
Weight, kg	18000

Special statement :

- 1、 The technical data are based on natural gas with a lower calorific value of 36MJ/Nm³.The technical data indicated is based on standard conditions according to ISO8528/1, ISO3046/1 and BS5514/1.
- 2、 The technical data is measured in standard conditions:
Absolute atmospheric pressure: 100kPa
Ambient temperature : 25°C
Relative air humidity : 30%
- 3、 Rating adaptation at ambient conditions acc to DIN ISO 3046/1.
The tolerance for the specific fuel consumption is + 5 % at rated output.
- 4、 Technical data above are just for standard product ,and may be subject to change. As this document is used only for presale reference, take the specification supplied by PowerLink before ordering as final.

Power and efficiency @50Hz

Electric power -kW	1000	Electric efficiency	38.7%
Heat power-kW	1090	Heat efficiency	42.2%
Fuel input-kW	2584	Total efficiency	80.9%

Fuel and emission

Fuel type	Natural gas
Methane number	MN > 80
Excess air factor (Lambda)	1.7
Fuel consumption @100% load, m ³ /h	258
Supply gas pressure range, kPa	25~35
Emission without catalytic converter	
NOx , mg/Nm ³	<480mg/Nm ³
CO , mg/Nm ³	<870mg/Nm ³
HCHO (formaldehyde) , mg/Nm ³	<60mg/Nm ³
NMHC , mg/Nm ³	<150mg/Nm ³
Emission with catalytic converter (optional)	
NOx , mg/Nm ³	≤250

CG1000-NG

Natural Gas CHP Unit



Standard Basic Module + Acoustic Attenuated Container (Optional)



Dimension and Noise Level	
Optional container (mm) (customized container modeling service available)	☐ 12192*2438*2896
	☐ 12192*3000*2896
	☐ 13500*3000*2896
	☐ 15000*3200*3000
	☐ 17000*3200*3000
Noise Level@ 1m , dB(A)	86
@ 7m , dB(A)	75
@ 10m , dB(A)	70

- ☐ Outdoor application enabled, weatherproof and dustproof, corrosion preventive
- ☐ Environmental friendly low emission
- ☐ Modular designed and manufactured for plug and play
- ☐ Low noise does not affect the surrounding environment



CHP Unit performance data and manufacturing technology

CHP unit model	CG1000-NG	Power and efficiency			
Electric output power (kW)	1000	Load	100%	75%	50%
Heat output power (kW)	1090	Electric power (kW)	1000	750	500
CHP unit electric efficiency	38.7%	Heat power (kW)	1090	771	547
CHP unit heat efficiency	42.2%	Energy input (kW)	2584	1910	1320
CHP unit total efficiency	80.9%	Electric efficiency	38.7%	39.3%	37.9%
Hot water production @inlet 70°C/outlet 90°C[t/h]	44.419	Heat efficiency	42.2%	40.4%	41.4%
Overload runtime at 1.1xSe(hour)	1	Total efficiency	80.9%	79.6%	79.3%
Steady-state voltage deviation	≤±1%	Manufacturing technology - Special welded base frame, inner vibration isolators and design for whole lifting - With high-class paint, enduring brightness as well resistance against abrasion and defacing - Installation manual, operation and maintenance manual wiring program Standards and certificate - ISO3046 , ISO8528 , GB2820 - BS5000PT99 , AS1359 , IEC34 - ISO9001:2008 quality system certification			
Transient-state voltage deviation	-15%~20%				
Voltage recovery time(s)	≤4				
Voltage unbalance	1%				
Steady-state frequency regulation	±0.5%				
Transient -state frequency regulation	±5%				
Frequency recovery time(s)	≤3				
Steady-state frequency band	0.5%				
Recovery time response(s)	0.5				
Telephone interference factor(TIF)	≤50				
Telephone harmonious factor(THF)	≤2% , as per BS4999				

AC alternator performance data

Alternator brand	Leroy-Somer	Voltage	Power
Alternator model	LSA50.2L8	380V	1200 kW
Rated output power (kW)	1200	400V	1200 kW
Power factor	0.8	415V	1200 kW
Rated current @ 400V and 100% load (A)	2165	440V	1150kW
Excitation system	Brushless		
THF (BS EN60034- 1)	<2%		
Bearing number	2		
Winding material	100% copper		
Wiring connection	Star		
Rotor insulation class	H		
Winding pitch	2/3		
A.V.R. model	R450		
Voltage fluctuation(no load to full load)	± 0.5%		
Housing protection	IP23		
TIF (NEMA MG 1-22)	<50		
Excitation method	AREP		
Rated ambient temperature(°C)	40		
Rated stator temperature rise(°C)	125		

Efficient gas engine

General data

NO. of cylinders		16
Engine type	4-stroke, turbo charged and air to water cooled, lean burn	
Cylinder arrangement		V-form , 60°
Bore x stroke	mm	160×190
Displacement	L	61.123
Compression ratio		12 : 1
Rated speed	rpm	1500
Rated output power	kW	1042
Excess air factor		1.7
Rotation direction	Anti-clockwise viewed on flywheel	
Ignition timing	°BTDC	26

Cooling system

Total coolant capacity	L	95
Jacket water pressure in crankcase	kPa	≤100
Total coolant flow	L/min	950
Max. coolant exit temperature	°C	96
Max. coolant entry temperature	°C	81
Charge coolant flow	L/min	600
Charge coolant exit temperature	°C	40
Charge coolant entry temperature	°C	36
Coolant type	Mixture of 50% Inhibited ethylene glycol or propylene glycol and 50% clean fresh water. Lower ambient temp, higher content of antifreeze.	

Induction/exhaust system

Combustion air flow	m³/h	4728
Exhaust gas flow	m³/h	12395
Max. exhaust temp. before turbo	°C	600
Max. exhaust temp. after turbo	°C	468
Max. exhaust back pressure	mmH ₂ O	400
Max. suction restriction	mmH ₂ O	380
Exhaust outlet flange size	mm	2×152

Fuel control system

Gas train, Including:	ball valves
	filters
	gas pressure gauge
	safety solenoid valves
	constant pressure regulator etc
	gas pressure relief valve

Lubrication system

Total capacity	L	286
Sump maximum	L	257
Sump minimum	L	147
Oil temperature	°C	88
Oil pressure at rated speed	kPa	470
Oil flow - 1500rpm	L/min	402
Max. consumption	g/kWh	0.25
Oil type	Single grade	
Oil pump	Gear driven	

Energy balance

Load		100%
Mechanical power	kW	1042
Coolant and oil heat	kW	445
Charge coolant heat	kW	180
Exhaust heat up to 120°C	kW	646
Max. radiation heat	kW	114
Energy input	kW	2584

Ignition system



Ignition type	Electronic ignition system	
Polarity	Negative earth	
Spark plug	Separate for every cylinder	

Fuel consumption

100% load	m³/h	258
75% load	m³/h	191
50% load	m³/h	132

PCC-300 control system

Open control system is adopted with touch screen display , and various functions, including: engine protection and control, paralleling between gensets or gensets and mains, and CHP control functions, as well as communication functions, etc.

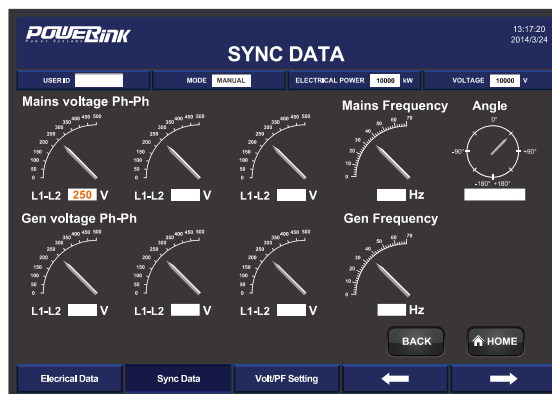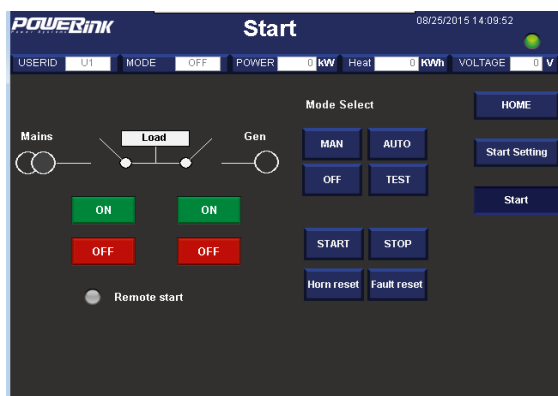

Main functions

- Engine monitor : coolant, lubrication, exhaust, battery
- Supply gas circuit monitor: pressure, temperature and CH4 content
- Auto paralleling and load share
- Voltage and PF control
- Alternator data : U, I, Hz, kW, kVA, kVAR, PF, kWh, kVAh
- Mains data: U, I, Hz, kW, kVAR, PF
- Modbus communication protocol based on RS232 and RS485 interfaces
- SMS message
- Internet connection and USB 2.0 interface
- 10-inch touch screen
- Internet monitor, auto orientation and cloud communication
- 1000 history events log

Advantages

- Accordant with consumer requirement
- Complete control project
- Convenient remote monitor and service
- Simplified engine start/stop control
- Enhanced stability and safety

Standard protection functions	Standard control functions	
Alternator protection - 2xReverse power - 2xOverload - 4xOvercurrent - 1xOvervoltage - 1xUndervoltage - 1xOver/under frequency 1xUnbalanced current	Power control - RPM control(synchronization) - Power control(grid connection) - Load share(island)	Voltage control - Voltage tracking (synchronization) - Voltage control(island) - PF control(grid connection) - Reactive power share (island)
	Lubrication control - Auto refilling - Warning and monitoring	Pump control - Cooling system - Emergency radiator
Busbar/mains protection - 1xOvervoltage - 1xUndervoltage - 1xOver/under frequency - 1xPhase sequence - 1xROCOF alarm	Fan control - Ventilation for engine room - Radiator fan - Emergency radiator fan	Valve control - Cooling system - Heating system - Emergency radiator
	Engine protection - Various routine and customized protection functions - Monitoring	

Standard configuration

Engine	Alternator	Canopy and base	Electrical cabinet
Gas engine Ignition system Lambda controller Electronic governor actuator Electrical start motor Battery system Auto charging system Detonation control system Cylinder temp. protection system Coupling	AREP AC alternator H class insulation IP23 protection AVR voltage regulator PF control	Steel monocoque base frame Engine bracket Vibration isolators Alternator base	Air circuit breaker Paralleling control system 10-inch touch screen Communication interfaces Electrical switch cabinet
Gas supply system	Lubrication system	Standard voltage	Induction/ exhaust system
Gas safety train Air/fuel mixer	Oil filter Daily auxiliary oil tank Auto refilling oil system New and used oil tank (Only applicable to container , two inch with the daily oil tank)	380/220V 400/230V 415/240V 440/254V	Air filter Exhaust silencer Exhaust bellows Gas flowmeter Gas leakage protection(Only applicable to canopy and container)
Heat exchange system	Service and documents		
Exhaust heat exchanger Jacket water circulation pump Jacket water heat exchanger Mixture circulation pump Intercooler radiator Expansion tank, Shut-off valve Three-way auto proportional valve	Tools package Installation and operation manual Maintenance manual Software manual Parts manual	Engine operation and maintenance manual Gas quality specification Control system manual After service guide Standard package	

Optional configuration

Engine	Alternator	Lubrication system
Heavy duty air filter Backfire safety control valve Jacket water heater	Space heater Treatments against humidity and corrosion	Oil consumption gauge
Canopy and base	Gas supply system	Heat exchange system
SECC base frame	Gas flow gauge	Jacket water radiator
Exhaust system	Service and documents	Voltage
Guard shield from touch Residential silencer Three-way catalytic converter	Service tools Maintenance and service parts	220V 230V 240V